

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 29 TWN. 15_N RNG. 3_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 7-30-09
Party Chief: Wilcoxon
Crew: Finney
Type of Marker: Cut 'x' found
Method of Establishment: County: 11-17-1986
IN S.P.C. E Zone, NAD 83
Name: 15032904
N: 495 794.254 0(m)
E: 51 313.294 0(m)

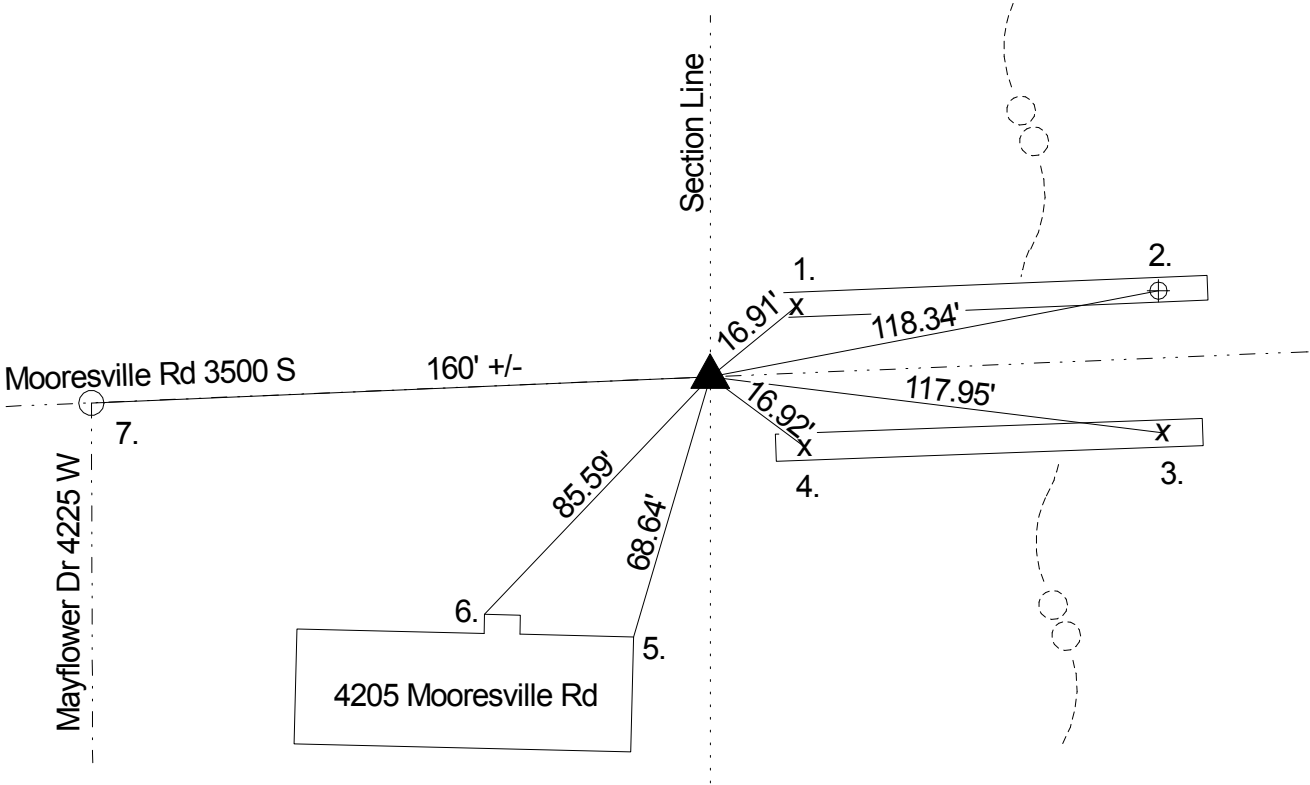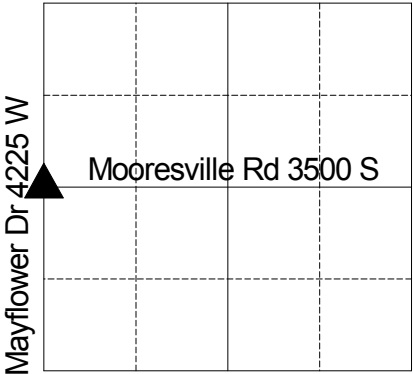

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 18” beech bearing N 83 W 6 links and a 24” sycamore bearing N 76 E 4 links (Marion County Atlas p. 7). A survey by H.B. Fatout on October 27, 1881 indicates no stone or witnesses (Decatur Legal Book p. 7). Corner referenced by Miller on 10/9/1975 and called a brass plug. Corner referenced by Greene on 11/17/86 and called a brass plug. Corner referenced by Kiste on 7/19/1996 and called a brass plug. Corner referenced by Wilcoxon on 9/4/2003 and called a cut x. Corner referenced by Wilcoxon on 7/30/09 and called a cut x.

REF.	DISTANCE	DESCRIPTION
1.	16.91'	Cut 'x' W end of northern concrete walk
2.	118.34'	Flood control bench mark D40A : Elev. 687.74'
3.	117.95'	Cut 'x' E end of southern concrete walk
4.	16.92'	Cut 'x' W end of southern concrete walk
5.	68.64'	NE corner of 4205 Mooreville Rd
6.	85.59'	NW corner of concrete slab of porch 4205 Mooreville Rd
7.	160' +/-	Due W to C/L of Mayflower Dr